

**ELFOO SUSPENDED LINEAR LIGHT**

**PRODUCT DETAILS**



Size: 1200mm, Linkable  
 Rated life: L80 B10 50000hrs  
 LED: 4000K, CRI80, 3SDCM  
 Glare control: UGR19 design  
 Beam angle: Symmetrical, Direct (80°) & Indirect (140°)  
 Driver: Integral, DALI dimming, Flicker-Free design  
 Rating: IP20, Class I  
 Operating temperature: -20°C to +45°C  
 Housing: Aluminium  
 Finishing: White/Black, Powder coated, Black reflectors  
 Diffuser/Lens: Polycarbonate (PC), Frosted  
 Connection: 1.5m cable with ceiling rose  
 Accessory: Complete with suspension kit  
 Warranty: 5 year

**MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)**

Other sizes, Other finishes, Non-Dim, Other Dimming options, Casambi, Tunable white

**APPLICATIONS**

Suspended (ceiling), Internal  
 Offices, Schools, Commercial interiors

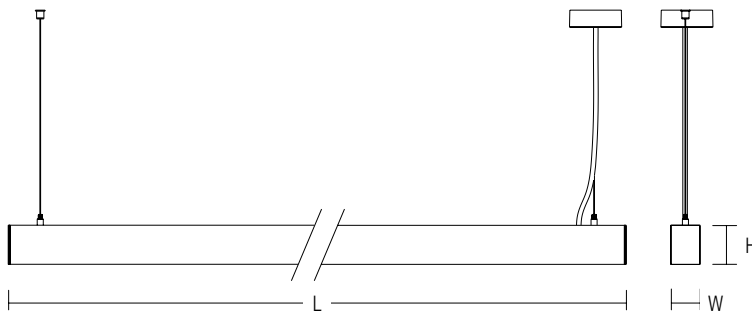

VERSION	L (MM)	W (MM)	H (MM)
1200MM	1285	48	76

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS*	EFFICACY	WEIGHT
ELFOODI12840DAW	ELFOO SUSPENDED LINEAR LIGHT 1200MM 60W 4000K CRI80 UGR19 DALI WHITE	60W	6633LM	111LM/W	3.7KG
ELFOODI12840DAB	ELFOO SUSPENDED LINEAR LIGHT 1200MM 60W 4000K CRI80 UGR19 DALI BLACK	60W	6633LM	111LM/W	3.7KG

<sup>~</sup>Tested system powers from luminaire. <sup>\*</sup>Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>^</sup>Figures are interpolated / extrapolated from data at other versions.