



HIGHBAY SENSOR



PRODUCT DETAILS:

- Plug-and-Play installation via pre-fitted piggyback plug and socket
- ON/OFF control up to 800W
- HF sensor technology for reliable movement detection
- Maximum detection range 360° 10M(Ø)x12M(H)
- Adjustable detection range (100%/75%/50%/10%)
- Intelligent photocell with daylight prior to motion detection
- Adjustable hold-time after last movement (2 sec to 30 min)
- Fast programming via integral rotary switch with 16 pre-sets
- Advanced programming via optional remote control
- Suitable for most highbay/lowbay fittings
- Rating: IP65, Class I
- Operating temperature: -20°C to +50°C
- Colour: Black
- Connection: 1.6m Flex & Plug
- Warranty: 5 year

APPLICATIONS:

Internal, External
Warehouses, Factories, Storage facilities, Shopping/retail centres

ROTARY SWITCH POSITION	DETECTION RANGE	HOLD-TIME	DAYLIGHT SENSOR
0	100%	5 SEC	DISABLED
1	100%	1 MIN	2 LUX
2	100%	5 MIN	10 LUX
3	100%	5 MIN	30 LUX
4	100%	5 MIN	10 LUX
5	100%	5 MIN	30 LUX
6	100%	5 MIN	DISABLED
7	100%	10 MIN	2 LUX
8	100%	10 MIN	10 LUX
9	100%	10 MIN	30 LUX
A	100%	10 MIN	DISABLED
B	75%	10 MIN	30 LUX
C	50%	10 MIN	10 LUX
D	100%	30 MIN	50 LUX
E	100%	30MIN	DISABLED
F	100%	5 SEC	2 LUX

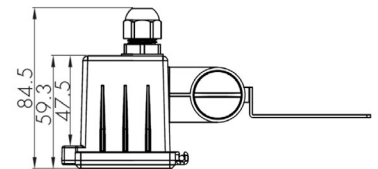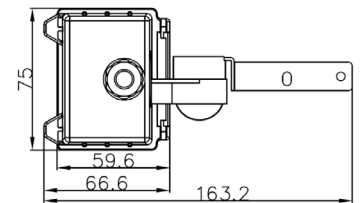

CODE	DESCRIPTION
ECOHSFHF	HIGHBAY SENSOR DAYLIGHT AND MOTION DETECTION WITH ON/OFF CONTROL
PRC11	REMOTE CONTROL FOR HIGHBAY SENSOR