

PWA WEATHERPROOF BATTEN

PRODUCT DETAILS:

- Size: 5ft/1500mm
- Rated life: L80/B10 50000hrs
- LED: CCT 4000K/5000K, CRI>80, 3 SDCM
- Driver: Integral, Non-Dim
- Rating: IP67(with surface mount brackets), Class I, Resistant to a wide range of chemicals
- Operating temperature: -20°C to +40°C
- Housing: GRP (Glass Reinforced Plastic), Durable foam seal, Clip-In gear tray with safety lanyards,
- Finishing: Grey
- Diffuser/Lens: PMMA (Acrylic), Frosted, Prismatic
- Accessory: Complete with stainless steel Clips, Surface mount brackets, Suspension hooks
- Warranty: 5 year






MADE TO ORDER OPTIONS (lead time and MOQ may apply):

DALI/PUSH/1-10V dimming, Emergency, IK08 polycarbonate diffuser

APPLICATIONS:

Surface mount (wall/ceiling), Suspended, Internal, External
Factories, Industrial areas, Manufacturing plants, Food preparation, Supermarkets, Cool rooms and cold stores, Swimming pools

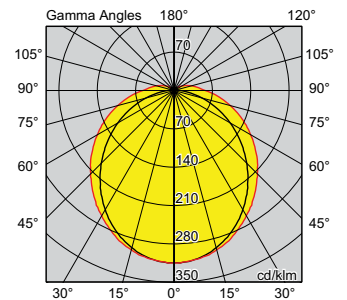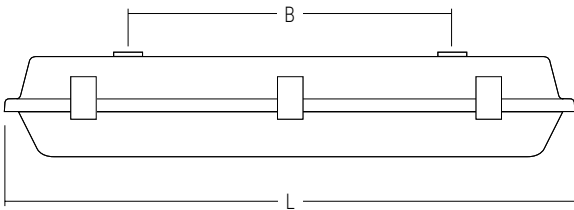

5FT/1500MM 56W 5000K

VERSION	L (MM)	B (MM)	W (MM)	H (MM)
5FT/1500MM	1612	1100	172	105

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
PWALED56/5/5K	5FT/1500MM 56W 5000K CRI>80 NON-DIM	55W [^]	7600lm [^]	138lm/W [^]	4.4kg
96001187	5FT/1500MM IK08 POLYCARBONATE DIFFUSER				

*Delivered lumens from luminaire, including thermal, electrical and optic losses. [~]Tested system powers from luminaire.

[^]Figures are interpolated / extrapolated from data at other versions.