

COLOUR SELECT

SLIMLINE LED OYSTER





PRODUCT DETAILS:

- Size: Ø300, Ø400
- Rated life: L70/B50 54000hrs
- LED: Colour Select via DIP Switch, CCT 3000K/4000K/6000K, CRI>80, 7 SDCM
- Beam angle: Symmetrical, 100°
- Driver: Integral, Phase dimming
- Rating: IP54, Class II
- Operating temperature: -10°C to +40°C
- Housing: Polycarbonate
- Finishing: White
- Diffuser: Polycarbonate, Frosted
- Connection: Center cable entry
- Warranty: 5 year

APPLICATIONS:

Surface mount, Internal
Residential, Commercial spaces

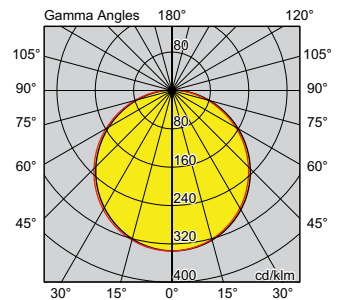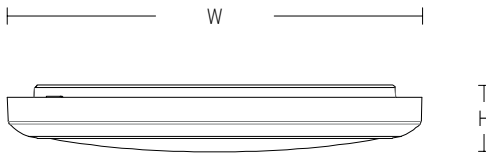

Ø400 27W @4000K

VERSION	W (MM)	H (MM)
18W	Ø300	50
27W	Ø400	50

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
SLMOYS183/4/6K	Ø300 18W COLOUR SELECT 3000K/4000K/6000K CRI>80 PHASE-DIM	18W	1661lm [^]	92lm/W	0.9kg
SLMOYS273/4/6K	Ø400 27W COLOUR SELECT 3000K/4000K/6000K CRI>80 PHASE-DIM	27W	2417lm [^]	90lm/W	1.5kg

*Delivered lumens from luminaire, including thermal, electrical and optic losses. [~]Tested system powers from luminaire. [^]@4000K.