

BWP ECO CRI90 WEATHERPROOF BATTEN GEN2



PRODUCT DETAILS



Size: 5ft/1500mm
 Rated life: L70 B50 54000hrs
 LED: Colour Select 4000K/5000K/6500K, CRI90, 5SDCM
 Beam angle: Symmetrical, 100°
 Driver: Integral, Non-Dim
 Rating: IP65, IK08, Class I
 Operating temperature: -10°C to +40°C
 Housing: Polycarbonate (PC), Clip-In gear tray with safety lanyards
 Finishing: Grey
 Diffuser/Lens: Polycarbonate (PC), Frosted
 Connection: Large terminal block, Ø20mm cable gland, Optional Knock-Out at the opposite end
 Accessory: Complete with stainless steel Clips, Surface mount brackets, Suspension hooks
 Warranty: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Dimming options, Emergency, Sensor

APPLICATIONS

Surface mounted (ceiling/wall), Suspended (ceiling), Internal/External Carparks, Commercial spaces, Wash bays, Security applications

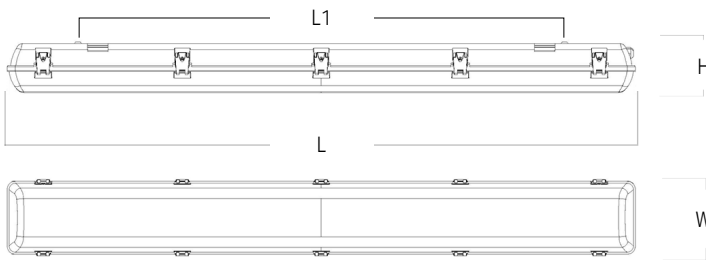

VERSION	L (MM)	L1 (MM)	W (MM)	H (MM)
5FT/1500MM	1565	1000	130	92

CODE	DESCRIPTION	POWER [~]	LUMENS*	EFFICACY	WEIGHT
BWPECO505G290	BWP ECO IP65 BATTEN GEN2 5FT/1500MM LS&CS @ 27W 4000K CRI90 NON-DIM	27W	3410LM	126LM/W	2.7KG
	BWP ECO IP65 BATTEN GEN2 5FT/1500MM LS&CS @ 37W 4000K CRI90 NON-DIM	37W	4556LM	123LM/W	2.7KG
	BWP ECO IP65 BATTEN GEN2 5FT/1500MM LS&CS @ 44W 4000K CRI90 NON-DIM	44W	5296LM	120LM/W	2.7KG
	BWP ECO IP65 BATTEN GEN2 5FT/1500MM LS&CS @ 56W 4000K CRI90 NON-DIM	56W	6327LM	113LM/W	2.7KG

[~]Tested system powers from luminaire. *Delivered lumens from luminaire, including thermal, electrical and optic losses.