

**LUMEN SELECT™**

**BWP PRO G2 WEATHERPROOF BATTEN**



**PRODUCT DETAILS:**



- Size: 2ft/600mm, 4ft/1200mm, 5ft/1500mm
- Rated life: L70/B50 72000hrs
- LED: CCT 4000K/6500K, CRI>80, 3 SDCM
- Driver: TCI, Integral, Non-Dim/DALI dimming, Lumen Select via DIP Switch, Flicker-Free design
- Rating: IP65, IK08, Class I
- Operating temperature: -20°C to +40°C
- Housing: Polycarbonate, Durable foam seal, Clip-In aluminium gear tray with safety lanyards
- Finishing: Grey
- Diffuser: Polycarbonate, Frosted, Prismatic
- Accessory: Complete with 316 stainless steel Clips, Surface mount brackets, Suspension hooks
- Warranty: 7 year

**MADE TO ORDER OPTIONS:**

Emergency (Compliant to AS/NZS2293), Motion sensor

**APPLICATIONS:**

Surface mount, Suspended, Internal, External  
Carparks, Light commercial spaces, Wash bays, Covered security applications

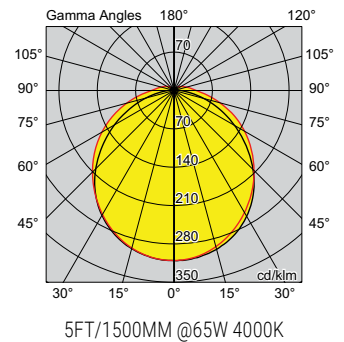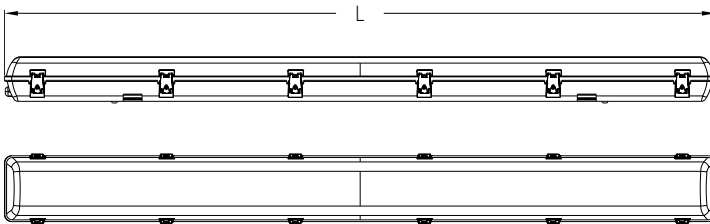

VERSION	L (MM)	W (MM)	H (MM)
2FT/600MM	655	145	101
4FT/1200MM	1265	145	101
5FT/1500MM	1566	145	101

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>+</sup>	EFFICACY	WEIGHT
BWP352D4	2FT/600MM LUMEN SELECT @10W 4000K CRI>80 DALI-DIM	10W	1312lm	131lm/W	1.6kg
	2FT/600MM LUMEN SELECT @25W 4000K CRI>80 DALI-DIM	25W	3118lm	128lm/W	1.6kg
	2FT/600MM LUMEN SELECT @35W 4000K CRI>80 DALI-DIM	38W	4523lm	119lm/W	1.6kg
BWP584D4	4FT/1200MM LUMEN SELECT @25W 4000K CRI>80 DALI-DIM	26W	3279lm	126lm/W	2.8kg
	4FT/1200MM LUMEN SELECT @35W 4000K CRI>80 DALI-DIM	34W	4509lm	133lm/W	2.8kg
	4FT/1200MM LUMEN SELECT @58W 4000K CRI>80 DALI-DIM	59W	7170lm	122lm/W	2.8kg
BWP655D4	5FT/1500MM LUMEN SELECT @30W 4000K CRI>80 DALI-DIM	28W	3904lm	139lm/W	3.3kg
	5FT/1500MM LUMEN SELECT @40W 4000K CRI>80 DALI-DIM	38W	5171lm	136lm/W	3.3kg
	5FT/1500MM LUMEN SELECT @65W 4000K CRI>80 DALI-DIM	61W	7771lm	127lm/W	3.3kg

Change the last two digits of the code: "D" for DALI dimming, "E" for Non-Dim, "4" for CCT 4000K, "6" for CCT 6500K.

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.