











## **BLADE SURFACE MOUNTED LINEAR LIGHT**

## PRODUCT DETAILS

Size:100mm, 285mm, 565mm, 845mm, 1125mm, Linkable

Rated life: L70 B50 50000hrs LED: 3000K, CRI80, 3SDCM Beam angle: Symmetrical, 120°

Driver: Remote, Non dimmable, Flicker free design

Rating: IP20, Class III

Operating temperature: 0°C to +25°C Housing: 6063 extruded aluminum

Finishing: Silver

Diffuser/Lens: Polycarbonate (PC), Frosted

Connection: Up to 55W, Male to female Plug-and-Play connection, Can be connected in various lengths to provide continuous and even


light distribution Warranty\*: 5 year


## MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

4000K, Dimming options

## **APPLICATIONS**

Surface mounted (ceiling/wall), Internal Commercial, Retail, Residential, Shop fronts, Cove lighting, Display cabinets, Shelving

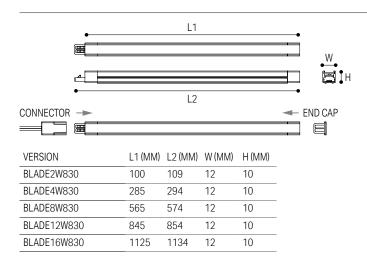



CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
BLADE2W830	BLADE SURFACE MOUNTED 100 2W 3K FIXTURE ONLY	2W	110LM	55LM/W	16G
BLADE4W830	BLADE SURFACE MOUNTED 285 4W 3K FIXTURE ONLY	4W	390LM	98LM/W	36G
BLADE8W830	BLADE SURFACE MOUNTED 565 8W 3K FIXTURE ONLY	8W	630LM	79LM/W	73G
BLADE12W830	BLADE SURFACE MOUNTED 845 12W 3K FIXTURE ONLY	12W	960LM	79LM/W	100G
BLADE16W830	BLADE SURFACE MOUNTED 1125 16W 3K FIXTURE ONLY	16W	1180LM	74LM/W	132G
BLADEPC200	POWER CORD 200MM FOR CONNECTION BETWEEN DISTRIBUTION BOX AND FIXTURE				
BLADEPC2000	POWER CORD 2000MM FOR CONNECTION BETWEEN DISTRIBUTION BOX AND FIXTURE				
BLADECC150	CONNECTION CORD 150MM FOR CONNECTION BETWEEN FIXTURES				
BLADEMAGKIT	MAGNET MOUNTING KIT FOR FIXING ON TO NON-MAGNETIC SURFACES (OPTIONAL)				
BLADEJB06	6-WAY DISTRIBUTION BOX				
127821	TCI DRIVER LCV 24V 60W 2.5A MAX				

\*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.





