

**LUMEN SELECT™**

**C350 LOWBAY GEN2**



**PRODUCT DETAILS**



Rated life: L70 B50 54000hrs  
 LED: 4000K/5000K, CRI80, 5SDCM  
 Beam angle: Symmetrical, 120°  
 Driver: Integral, Lumen Select Non-Dim/DALI dimming  
 Rating: IP65, IK09, Class I  
 Operating temperature: 0°C to +50°C  
 Housing: Die-cast LM6 aluminium (copper content <0.1%)  
 Finishing: Grey RAL9007, Powder coated  
 Diffuser/Lens: Glass, Frosted  
 Accessory: Recess kit (order separately)  
 Warranty: 5 year

**MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)**

IK10 diffuser polycarbonate (PC) frosted

**APPLICATIONS:**

Surface mounted/Recessed (ceiling), Internal/External  
 Service stations. General canopies, Sports facilities, Warehousing,  
 Industrial facilities, Workshops, Coolrooms, Carparks

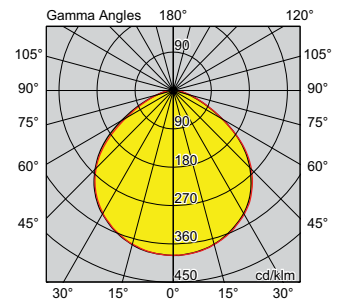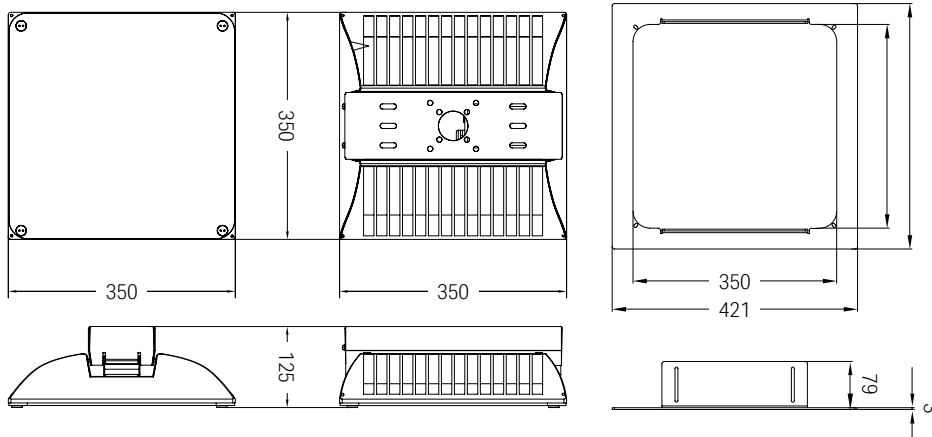

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS*	EFFICACY	WEIGHT
C350SLSE4	C350 LOWBAY GEN2 LS @ 65W 4000K CRI80 NON-DIM	63W	10542LM	167LM/W	7.3KG
	C350 LOWBAY GEN2 LS @ 100W 4000K CRI80 NON-DIM	101W	16726LM	166LM/W	7.3KG
	C350 LOWBAY GEN2 LS @ 150W 4000K CRI80 NON-DIM	150W	24000LM	160LM/W	7.3KG
C350SLSE5	C350 LOWBAY GEN2 LS @ 65W 5000K CRI80 NON-DIM	62W	10873LM	175LM/W	7.3KG
	C350 LOWBAY GEN2 LS @ 100W 5000K CRI80 NON-DIM	100W	17215LM	172LM/W	7.3KG
	C350 LOWBAY GEN2 LS @ 150W 5000K CRI80 NON-DIM	149W	24658LM	165LM/W	7.3KG
C350S150D4	C350 LOWBAY GEN2 150W 4000K CRI80 DALI	150W	24000LM	160LM/W	7.3KG
C350S150D5	C350 LOWBAY GEN2 150W 5000K CRI80 DALI	149W	24658LM	165LM/W	7.3KG
C350RECKIT	C350 LOWBAY RECESS KIT				

<sup>~</sup>Tested system powers from luminaire. <sup>\*</sup>Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>^</sup>Figures are interpolated / extrapolated from data at other versions.