



DLED RECESSED MODULE GEN3

PRODUCT DETAILS


Size: 600x600mm, 1200x300mm, 1200x600mm
 Rated life: L90 B50 54000hrs
 LED: 4000K, CRI90, 3SDCM
 Glare control: UGR19 design
 Beam angle: Symmetrical
 Driver: TCI, Remote, Non-Dim/DALI dimming, Flicker-Free design
 Rating: IP54 from below/IP40 from above, Class II
 Operating temperature: 0°C to +40°C
 Housing: Cold rolled steel
 Finishing: White RAL9003, Powder coated
 Diffuser/Lens: Acrylic (PMMA), Frosted, Prismatic
 Connection: 1.5m Flex & Plug, DALI cable (DALI versions only)
 Compliant: Cyanosis (COI 3.203)
 Warranty: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)


600x300mm, Other dimming options, Other lumen packages, Emergency, Surface mount frames, Plaster ceiling frames, Custom infill panels, Air handling trims, Anti-Microbial powder coating

APPLICATIONS

Recessed (grid ceiling), Internal
 Offices, Schools, Healthcare applications, Commercial interiors

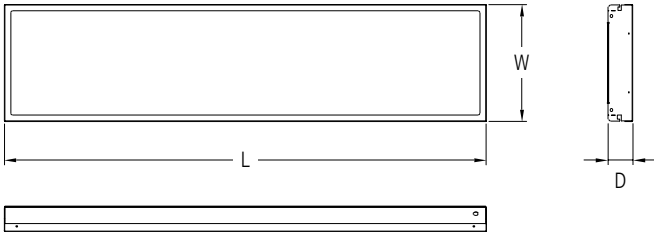

VERSION	L (MM)	W (MM)	D (MM)
600X600	590	590	62
1200X300	1190	290	62
1200X600	1190	590	62

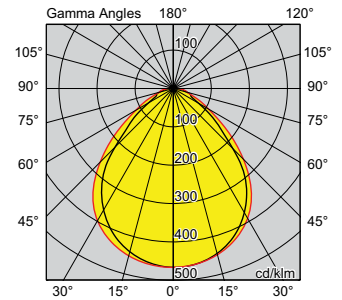

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
DL3P0669407	DLED GEN3 600X600 32W 4000K CRI90 UGR19 IP54 NON-DIM	32W	3502LM	109LM/W	4.5KG
DL3P0669407D1	DLED GEN3 600X600 32W 4000K CRI90 UGR19 IP54 DALI	32W	3502LM	109LM/W	4.5KG
DL3P1239407	DLED GEN3 1200X300 33W 4000K CRI90 UGR19 IP54 NON-DIM	33W	3555LM	108LM/W	4.8KG
DL3P1239407D1	DLED GEN3 1200X300 33W 4000K CRI90 UGR19 IP54 DALI	33W	3555LM	108LM/W	4.8KG
DL3P1269409	DLED GEN3 1200X600 40W 4000K CRI90 UGR19 IP54 NON-DIM	40W	4700LM	118LM/W	8.0KG
DL3P1269409D1	DLED GEN3 1200X600 40W 4000K CRI90 UGR19 IP54 DALI	40W	4700LM	118LM/W	8.0KG
DL3P12694010	DLED GEN3 1200X600 47W 4000K CRI90 UGR19 IP54 NON-DIM	47W	5475LM	116LM/W	8.0KG
DL3P12694021	DLED GEN3 1200X600 99W 4000K CRI90 UGR19 IP54 NON-DIM	99W	10970LM	111LM/W	8.0KG

[~]Tested system powers from luminaire. ^{*}Delivered lumens from luminaire, including thermal, electrical and optic losses. [^]Figures are interpolated / extrapolated from data at other versions.