

## DIRECTOR 2 EXIT - WALL



### PRODUCT DETAILS:


- Rated life: L70 50000hrs
- Driver: Integral
- Operating temperature: 0°C to +40°C
- Housing: Polycarbonate
- Colour: White
- Diffuser: Includes all pictogram inserts
- Emergency: Maintained, Lithium iron phosphate (LiFeP04) battery, 18 months shelf life
- Certification: Compliant to AS/NZS2293
- Viewing distance: 24m
- Warranty: 5 years on fixture and lamp, 4 years on the battery

### MADE TO ORDER OPTIONS:

DALI or Rapix ready

### APPLICATIONS:

Wall mount, Single and double sided applications  
Commercial, Schools, Retail, Hospitality, Apartments

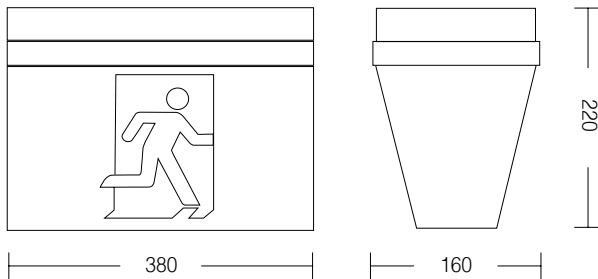

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
DIRLEDPSSL	4.6W NON-DIM EMGY - WALL MOUNT	1W	48lm	48lm/W	1.3kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses.