


LUMEN SELECT™ COLOUR SELECT

**ECO BATTEN GEN3**

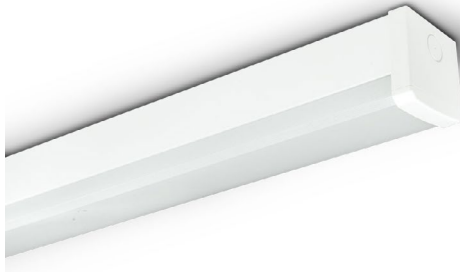

**PRODUCT DETAILS**



Size: 2ft/600mm, 4ft/1200mm, 5ft/1500mm  
 Rated life: L70 B50 54000hrs  
 LED: Colour Select 4000K/5000K/6500K, CRI80, 5SDCM  
 Beam angle: Symmetrical, 120°  
 Driver: Integral, Lumen Select, Non dimmable, Flicker free design  
 Rating: IP20, IK06, Class I  
 Operating temperature: 0°C to +40°C  
 Housing: Steel  
 Finishing: White RAL9003, Powder coated  
 Diffuser/Lens: Polycarbonate (PC), Frosted, Insect proof  
 Connection: Removable LED module with quick release clips and connector, Ø20mm knockout for conduit or cable glands, Center cable entry, End to end mounting  
 Warranty\*: 5 year

**MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)**

Dimming, Emergency

**APPLICATIONS**

Surface mounted (ceiling/wall), Internal  
 Commercial, Retail, Residential

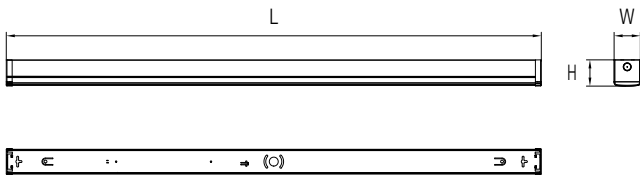

VERSION	L (MM)	W (MM)	H (MM)
ECOBAT202ECSG3	603	74	74
ECOBAT404ECCLS	1164	74	74
ECOBAT505ECCLS	1500	74	74

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
ECOBAT202ECSG3	ECO BATTEN 2FT 18W 4/5/65K @ 4K	18W	1900LM	106LM/W	0.80KG
ECOBAT404ECCLS	ECO BATTEN 4FT 20/26/31/37W 4/5/65K @ 4K	20W	2400LM	120LM/W	1.50KG
		26W	3000LM	115LM/W	
		31W	3500LM	113LM/W	
		37W	3900LM	105LM/W	
ECOBAT505ECCLS	ECO BATTEN 5FT 29/37/45/52W 4/5/65K @ 4K	29W	4000LM	138LM/W	1.80KG
		37W	5000LM	135LM/W	
		45W	5800LM	129LM/W	
		52W	6400LM	123LM/W	

\*Please refer to the warranty policy at [www.pierlite.co.nz](http://www.pierlite.co.nz); "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.