




HORNET LED FLOODLIGHT

PRODUCT DETAILS:

- Rated life: L70 30000hrs
- LED: CCT 4000K, CRI>80
- Beam angle: 120°
- Driver: Integral, Non-dim
- Rating: IP66, IK07
- Operating temperature: 0°C to 40°C
- Housing: Die-cast Aluminium
- Colour: Black
- Lens: Acrylic
- Connection: 1m cable
- Warranty: 3 year

APPLICATIONS:


Ceiling mount, External
Residential, Access areas, Outdoor entertaining areas, BBQ areas

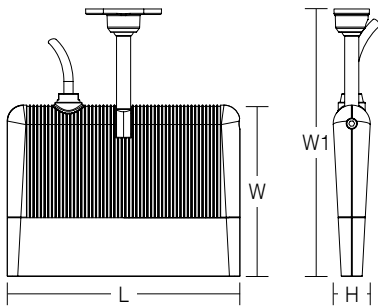

VERSION	L (mm)	W (mm)	H (mm)	W1 (mm)
20W	125	125	23	186



Adjustable head with 300° horizontal and 200° vertical flexible rotation.

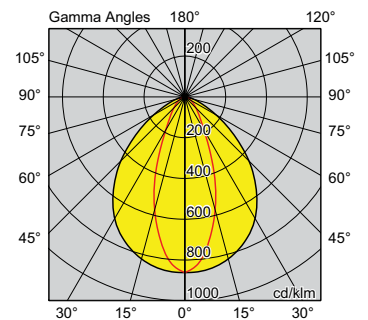

HORNET LED FLOODLIGHT
20W 4000K

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
CFL20840	20W 4000K CRI>80 NON-DIM	20W	1503lm	75lm/W	0.4kg

*Delivered lumens from luminaire, including thermal, electrical and optic losses.