

JUMBO LED G2 EXIT LIGHT



PRODUCT DETAILS:




- Size: 32m viewing distance, 40m viewing distance
- Rated life: L70 50000hrs
- Driver: Integral, Non-Dim
- Rating: Class I
- Operating temperature: 0°C to +40°C
- Housing: Polycarbonate, Swivel panel single/doubled sided, All in one solution including all pictogram inserts
- Colour: White
- Emergency: Maintained, 2hrs emergency, Complete with replaceable lithium iron phosphate (LiFeP04) battery, Manual test
- Compliant: AS/NZS 2293
- Warranty: 3 year including battery

MADE TO ORDER OPTIONS:

DALI

APPLICATIONS:

Surface, Internal
Large open areas, Commercial buildings, Airports, Hotels, Retail, Apartments, Hospitals

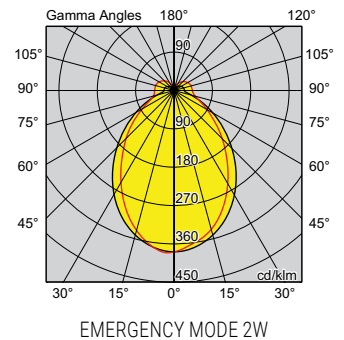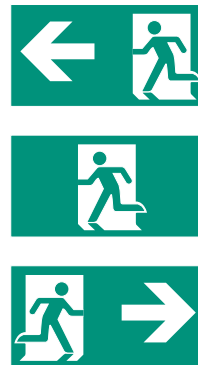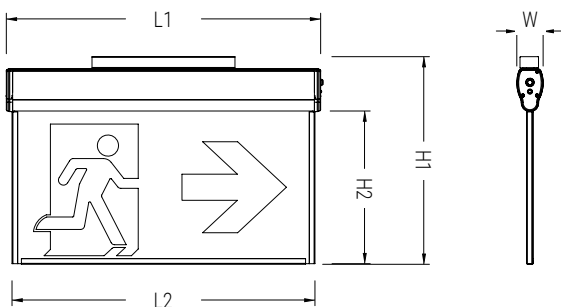

VERSION	L1 (MM)	L2 (MM)	W (MM)	H1 (MM)	H2 (MM)
32M VIEWING	447	426	46	311	215
40M VIEWING	553	533	46	365	269

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
EXLED32MJ-L	32M VIEWING 7W MAINTAINED EMGY EMERGENCY MODE	7W 2W	190lm	95lm/W	1.8kg
EXLED40MJ-L	40M VIEWING 7.5W MAINTAINED EMGY EMERGENCY MODE	7.5W 2W	3419lm 190lm	95lm/W	2.0kg

*Delivered lumens from luminaire, including thermal, electrical and optic losses.