


LENO FLAT SURFACE MOUNTED LINEAR LIGHT

PRODUCT DETAILS

Size: 1200mm, Linkable
 Rated life: L80 B10 50000hrs
 LED: 4000K, CRI80, 3SDCM
 Glare control: UGR19 design
 Beam angle: Symmetrical, Direct (50°)
 Driver: Integral, DALI dimming, Flicker-Free design
 Rating: IP20, Class I
 Operating temperature: -20°C to +45°C
 Housing: Aluminium
 Finishing: White/Black, Powder coated, Black reflectors
 Diffuser/Lens: Polycarbonate (PC), Frosted
 Warranty: 5 year


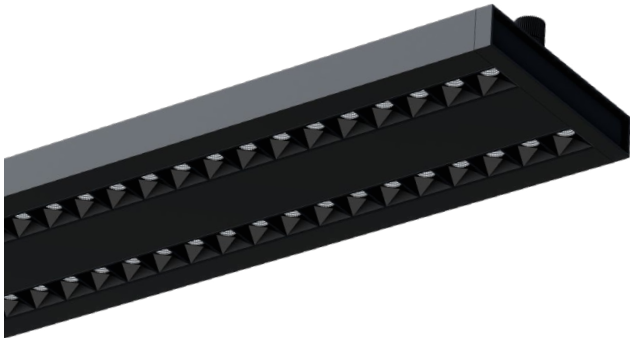


MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Other sizes, Other finishes, Non-Dim, Other Dimming options, Casambi, Tunable white

APPLICATIONS

Surface mounted (ceiling), Internal
 Offices, Schools, Commercial interiors

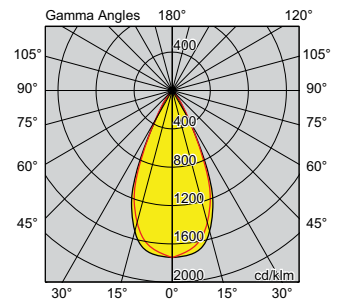

VERSION	L (MM)	W (MM)	H (MM)
1200MM	1190	160	30

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
LENOF12840DAW	LENO FLAT SURFACE MOUNTED LINEAR LIGHT 40W 4000K CRI80 UGR19 DALI WHITE	40W	3727LM	93LM/W	3.6KG
LENOF12840DAB	LENO FLAT SURFACE MOUNTED LINEAR LIGHT 40W 4000K CRI80 UGR19 DALI BLACK	40W	3727LM	93LM/W	3.6KG

[~]Tested system powers from luminaire. ^{*}Delivered lumens from luminaire, including thermal, electrical and optic losses. [^]Figures are interpolated / extrapolated from data at other versions.