

COLOUR SELECT

LITELUX LED G3 DOWNLIGHT






PRODUCT DETAILS

Size: Ø90mm (Cut-out), Ø115mm (ceiling plate)
 Rated life: L70/B50 36000hrs
 LED: Colour Select, CCT 3000K/4000K/6500K, CRI80, 5 SDCM
 Beam angle: Symmetrical, 100°
 Driver: Remote, Phase-Cut dimming
 Rating: IC-4/IC-F, IP65 (front)/IP20 (rear), Class II
 Operating temperature: 0°C to +40°C
 Housing: Thermoplastic, Aluminium 1060
 Finishing: White ceiling plate
 Diffuser/Lens: Polycarbonate, Frosted
 Connection: 1m remote terminal block
 Warranty: 5 year

APPLICATIONS

Recessed (ceiling), Internal
 Apartments, Residential

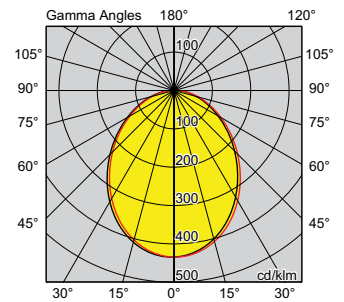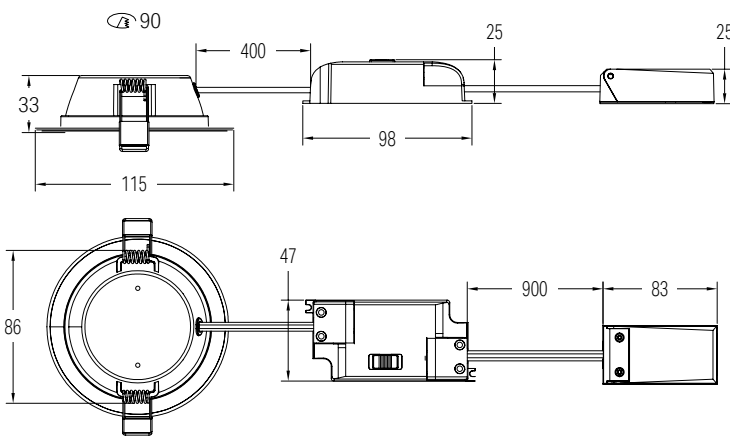

| CODE | DESCRIPTION | POWER [~] | LUMENS* | EFFICACY | WEIGHT |
|------------|--|--------------------|---------|----------|--------|
| DLP6FWG3NZ | 8W COLOUR SELECT 3000K/4000K/6500K CRI80 PHASE-CUT | 8W | 800LM | 100LM/W | 0.3KG |

[~]Tested system powers from luminaire. *Delivered lumens from luminaire, including thermal, electrical and optic losses.