

LUMEN SELECT™



OCULED TROFFER

PRODUCT DETAILS



Size: 1200x300mm
 Rated life: L90 B10 54000hrs
 LED: 4000K, CRI90, 3SDCM
 Beam angle: Symmetrical, 60°
 Glare control: UGR19 design
 Driver: Remote, Non dimmable/DALI dimming, Flicker free design
 Rating: IP20, Class II
 Operating temperature: 0°C to +40°C
 Housing: Steel, Aluminium central chamber
 Finishing: White RAL9003, Powder coated, Black reflectors
 Diffuser/Lens: Acrylic (PMMA), Frosted, Prismatic
 Connection: 1.2m Flex & Plug, 1.2m DALI quick connect with DALI versions
 Warranty*: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Other lumen package, Other dimming technology, Emergency, Surface mounted frame, Recessed frame

APPLICATIONS

Recessed (grid ceiling), Internal
 Offices, Schools, Commercial interiors

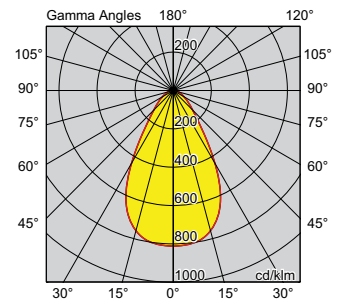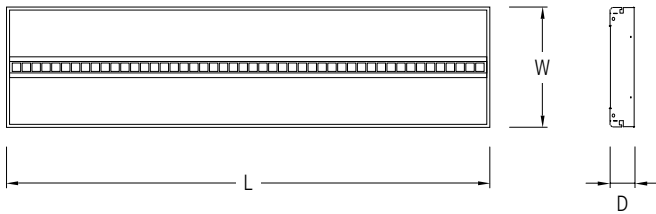

VERSION	L (MM)	W (MM)	H (MM)	F (MM)
OCLB12349F6	1190	590	66	1500

CODE	DESCRIPTION	POWER™	LUMENS*	EFFICACY	WEIGHT
OCLB12349F6	OCULED 1200X300 27W 4K	27W	2700LM	100LM/W	3.50KG
OCLB12349D6	OCULED 1200X300 27W 4K DALI DIM	27W	2700LM	100LM/W	3.50KG

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.