

LUMEN SELECT™ COLOUR SELECT





ORION SENSOR OYSTER GEN3

PRODUCT DETAILS

Size: Ø350mm
 Rated life: L70 B50 54000hrs
 LED: Colour Select 3000K/4000K/6000K, CRI80, 6SDCM
 Beam angle: Symmetrical, 110°
 Driver: Integral, Non dimmable
 Sensor: Microwave (MW)
 Rating: IP54, Class I
 Operating temperature: 0°C to +40°C
 Housing: Removable Polycarbonate (PC) trim, Steel base
 Finishing: White
 Diffuser/Lens: Acrylic (PMMA), Frosted
 Connection: Center cable entry, Large terminal block
 Warranty*: 5 year

APPLICATIONS

Surface mounted (ceiling), Internal
 Residential, Apartments, Commercial spaces

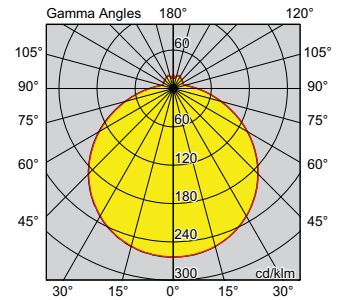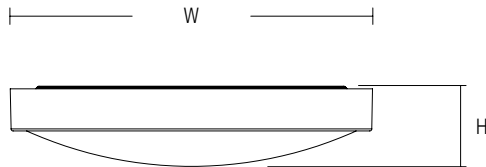

VERSION	W (MM)	H (MM)
ORN23W3/4/6KSG3	Ø350	80

CODE	DESCRIPTION	POWER [~]	LUMENS*	EFFICACY	WEIGHT
ORN23W3/4/6KSG3	ORION OYSTER 350 16/23W 3/4/6K SENSOR @ 4K WITH TRIM	16W	1400LM	88LM/W	0.79KG
	WITHOUT TRIM	16W	1500LM	94LM/W	
	WITH TRIM	23W	1900LM	83LM/W	
	WITHOUT TRIM	23W	2100LM	91LM/W	

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.