

**COLOUR SELECT**

**PIERLUX PLUS LED DOWNLIGHT**






**PRODUCT DETAILS:**

- Size: Ø145mm (25W Cut-out), Ø170mm (25W ceiling plate), Ø205mm (35W Cut-out), Ø220mm (35W ceiling plate)
- Rated life: L80/B50 54000hrs
- Colour Select via DIP Switch, CCT 3000K/4000K/6500K, CRI>80, 5 SDCM
- Beam angle: Symmetrical, 100°
- Driver: Remote, Phase-Cut dimming
- Rating: Do-Not-Cover, IP44 (front)/IP20 (rear), Class II
- Operating temperature: 0°C to +40°C
- Housing: Die-cast aluminium
- Finishing: White ceiling plate
- Diffuser/Lens: Polycarbonate, Frosted
- Connection: 1.2m Flex & Plug
- Warranty: 5 year

**APPLICATIONS:**

Recessed, Internal  
Commercial, Offices, Retail

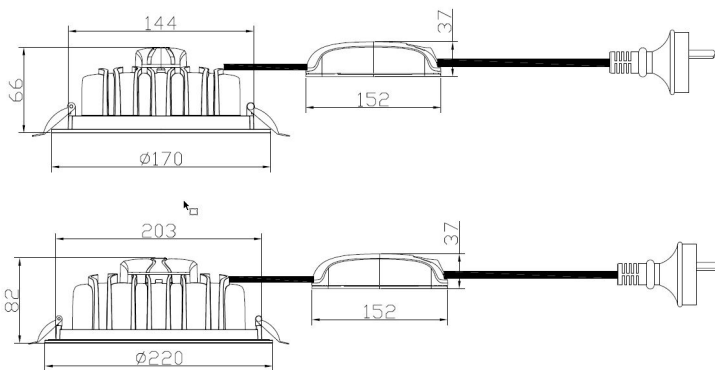

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>*</sup>	EFFICACY	WEIGHT
PLUX63/4/6KP	25W COLOUR SELECT 3000K/4000K/6500K CRI>80 PHASE-CUT-DIM	24W	2779lm <sup>^</sup>	116lm/W <sup>^</sup>	0.6kg
PLUX83/4/6K	35W COLOUR SELECT 3000K/4000K/6500K CRI>80 PHASE-CUT-DIM	33W	3860lm <sup>^</sup>	117lm/W <sup>^</sup>	0.9kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire. <sup>^</sup>@4000K.