

## SHADOW ECO 15-50W FLOODLIGHT






### PRODUCT DETAILS

Rated life: L70 B50 25000hrs  
 LED: Colour Select 3000K/4000K/6500K, CRI80, 6SDCM  
 Beam angle: Symmetrical, 100°  
 Driver: Integral, Lumen Select, Non dimmable  
 Rating: IP65, IK06, Class I  
 Operating temperature: -10°C to +40°C  
 Housing: LM6 Aluminium (copper content <0.1%)  
 Finishing: Black, Powder coated  
 Diffuser/Lens: Glass, Clear, Anti-fog breather  
 Connection: 1.0m Flex  
 Accessory: Complete with Corner mount bracket, Trunnion arm  
 Warranty\*: 5 year

### APPLICATIONS

Surface mounted (ceiling/wall), External  
 Residential, Light commercial

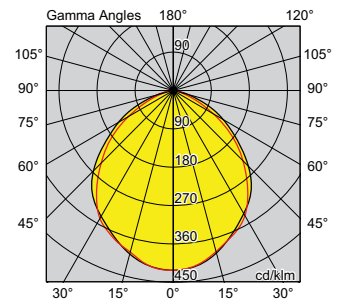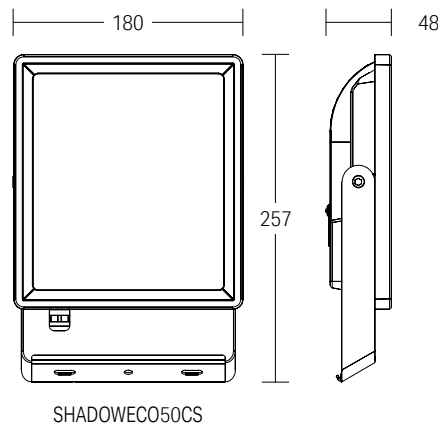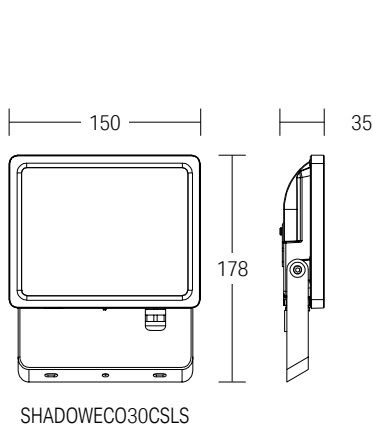

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
SHADOWECO30CSLS	SHADOW ECO FLOODLIGHT 15/29W 3/4/65K @ 4K	15W 29W	1800LM 3300LM	120LM/W 114LM/W	0.56KG
SHADOWECO50CS	SHADOW ECO FLOODLIGHT 47W 3/4/65K @ 4K	47W	5100LM	109LM/W	1.20KG

\*Please refer to the warranty policy at [www.pierlite.co.nz](http://www.pierlite.co.nz); "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.