

LUMEN SELECT™

SLENDER ACADEMY PANEL



PRODUCT DETAILS


- Size: 600x300mm, 600x600mm, 1200x300mm, 1200x600mm
- Lumen maintenance: L80 75,000hrs (TM21 calculated @ 40°C)
- LED: 4000K, CRI90 (R9≥60), 3SDCM
- Beam angle: Symmetrical, 90°
- Glare control: UGR19 design
- Driver: Remote, Lumen Select, DALI-2, 100,000hrs driver life
- Flicker free: PstLM≤0.01, SVM≤0.04
- Rating: IP40, Class II
- Operating temperature: 0°C to +40°C
- Housing: Aluminium trim, Steel back plate
- Finishing: White RAL9003, Powder coated
- Diffuser/Lens: Polystyrene (PS), Micro prismatic
- Connection: 1.2m Flex & Plug, 0.4m DALI quick connect
- Accessory: Complete with restraint/suspension hooks, Optional wire suspension kit
- Warranty: 5 year

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)


1-10V dimming, Emergency, Surface mounted frame, Recessed frame

APPLICATIONS

Recessed (grid ceiling), Internal
Schools, Offices, Waiting-rooms, Commercial interiors

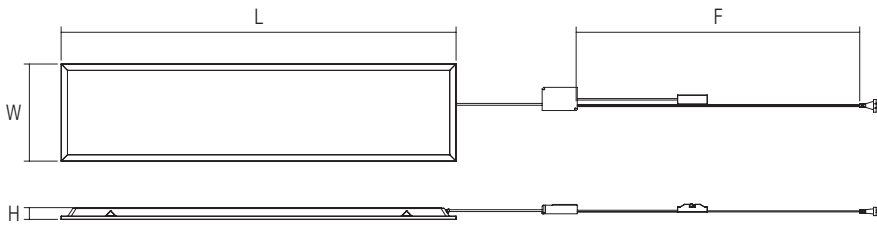

VERSION	L (MM)	W (MM)	H (MM)	F (MM)
SLA06349K19D1	594	294	36	1200
SLA06649K19D2	594	594	36	1200
SLA12349K19D2	1194	294	36	1200
SLA12649K19D3	1194	594	36	1200



CODE	DESCRIPTION	POWER [~]	LUMENS*	EFFICACY	WEIGHT
SLA06349K19D1	SLENDER ACADEMY 600X300 11/17/21W 4K DALI DIM	11W (MIN)	1200LM	109LM/W	1.30KG
		17W (DEF)	1700LM	100LM/W	
		21W (MAX)	2000LM	95LM/W	
SLA06649K19D2	SLENDER ACADEMY 600X600 22/39/42W 4K DALI DIM	22W (MIN)	2500LM	114LM/W	2.20KG
		39W (DEF)	4100LM	105LM/W	
		42W (MAX)	4300LM	100LM/W	
SLA12349K19D2	SLENDER ACADEMY 1200X300 22/40/43W 4K DALI DIM	22W (MIN)	2500LM	114LM/W	2.20KG
		40W (DEF)	4100LM	103LM/W	
		43W (MAX)	4300LM	100LM/W	
SLA12649K19D3	SLENDER ACADEMY 1200X600 43/51/60W 4K DALI DIM	43W (MIN)	5200LM	121LM/W	4.60KG
		51W (DEF)	6000LM	118LM/W	
		60W (MAX)	6800LM	113LM/W	
WIRESUSP/SLA	SLENDER ACADEMY WIRE SUSPENSION KIT	N/A	N/A	N/A	N/A

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.