

COLOUR SELECT

SLIMLINE OYSTER





PRODUCT DETAILS

Size: Ø300mm, Ø400mm
 Rated life: L70 B50 54000hrs
 LED: Colour Select 3000K/4000K/6000K, CRI80, 7SDCM
 Beam angle: Symmetrical, 100°
 Driver: Integral, Phase dimming
 Rating: IP54, Class II
 Operating temperature: 0°C to +40°C
 Housing: Polycarbonate (PC)
 Finishing: White
 Diffuser/Lens: Polycarbonate (PC), Frosted
 Connection: Center cable entry
 Warranty*: 5 year

APPLICATIONS

Surface mounted (ceiling), Internal
 Residential, Apartments, Commercial spaces

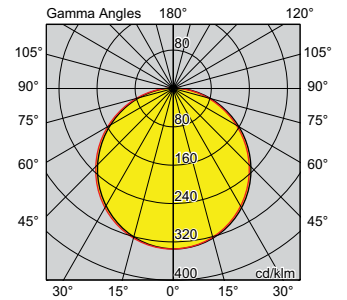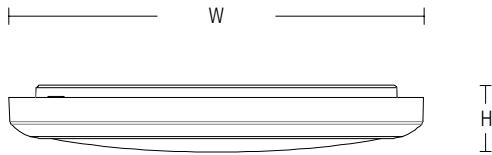

VERSION	W (MM)	H (MM)
SLMOYS183/4/6K	Ø300	50
SLMOYS273/4/6K	Ø400	50

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
SLMOYS183/4/6K	SLIMLINE OYSTER 300 17W 3/4/6K PHASE DIM @ 3K	17W	1600LM	94LM/W	0.90KG
SLMOYS273/4/6K	SLIMLINE OYSTER 400 27W 3/4/6K PHASE DIM @ 3K	27W	2200LM	81LM/W	1.50KG

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.