

Stingray Exit Light Gen3

A stylish, modern quick-connect, and efficient LED exit luminaire designed for interior exit sign applications

- Suitable for both ceiling and wall mounting
- Replaceable lithium iron phosphate (LiFePO4) battery
- Features manual testing and maintained emergency exit functionality, complete with all pictogram inserts



IP20

Ingress
Protection
Rating



0 to 40

Operating
Temperature



50,000hrs
(L70/B10)

Lifetime



5 Years

Warranty

CODE	SYSTEM POWER	DIMENSIONS	LUMINAIRE COLOUR	INRUSH CURRENT	INRUSH CURRENT DURATION	LINE CURRENT	CLASSIFICATION
STINGBKDAG3	5.2W	L399.80 x W81.50 x H249 mm	Black	42A	240µs	0.05A	
STINGBKG3	4.2W	L399.80 x W81.50 x H249 mm	Black	20A	140µs	0.04A	
STINGWHDAG3	5.2W	L399.80 x W81.50 x H249 mm	White	42A	24µs	0.05A	C0/C180: D10; C90/C270: D8
STINGWHDAG3IA	5.2W	L399.80 x W81.50 x H249 mm	White	42A	24µs	0.05A	C0/C180: D10; C90/C270: D8
STINGWHG3	4.2W	L399.80 x W81.50 x H249 mm	White	20A	140µs	0.04A	C0/C180: D8; C90/C270: D6.3

OPTION	BATTERY	BATTERY CHARGE	BATTERY VOLTAGE
Maintained	LiFePO4	2hr	6.4V

ACCESSORY CODE	DESCRIPTION
BLADEPROSUSKITWH	Rod and Wire Mounted Kit (Rod and wire excluded)
DGLCEM3200/1L11	Battery LiFePO4 1 Cell 3.2V 3200mAh

AS/NZS 2293.1:2018 Classification Table


STINGWHG3 C0/C180: D8 C90/C270 :D6.3			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	9.4	8.5	9.4
2.4	9.7	8.8	9.7
2.7	9.9	8.9	9.9
3	10.1	9.1	10.1

STINGWHG3

STINGWHDAG3 & STINGWHDAGT3 C0/C180: D10 C90/C270 :D8			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	10.2	9.4	10.2
2.4	10.5	9.7	10.5
2.7	10.8	9.9	10.8
3	11	10.1	11

STINGWHDAG3, STINGWHDAGT3

Line Drawings

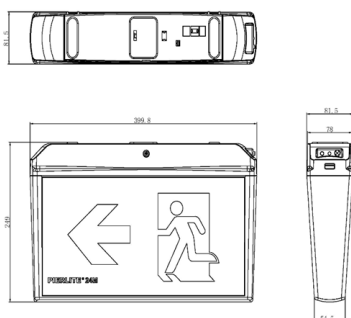



STINGWHG3, STINGWHDAG3



STINGWHG3, STINGWHDAG3



STINGBKG3, STINGBKDAG3



STINGBKG3, STINGBKDAG3



STINGBKG3, STINGBKDAG3