

VANDAGUARD WEATHERPROOF BATTEN GEN2

PRODUCT DETAILS

Size: 4ft/1200mm
 Rated life: L70 B10 72000hrs
 LED: 4000K, CRI80, 3SDCM
 Beam angle: Symmetrical, 120°
 Driver: Integral, Lumen Select, DALI dimming, Flicker free design
 Rating: IP66, IK10+, Class I
 Operating temperature: 0°C to +50°C
 Housing: : LM6 Aluminium (copper content <0.1%), Anti ligature and dustproof design
 Finishing: Grey RAL9007, Powder coated
 Diffuser/Lens: Polycarbonate (PC), Frosted
 Connection: Center cable entry, Large terminal block
 Accessory: Complete with 10 torx security or pentaforce screws
 Warranty*: 5 year





MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

2ft/600mm, Emergency, Sensor, Night light

APPLICATIONS

Surface mounted (ceiling/wall), Internal/External
 Custodial facilities, Mental health facilities, Transport facilities,
 Schools, Heavy industry and high vandalism areas

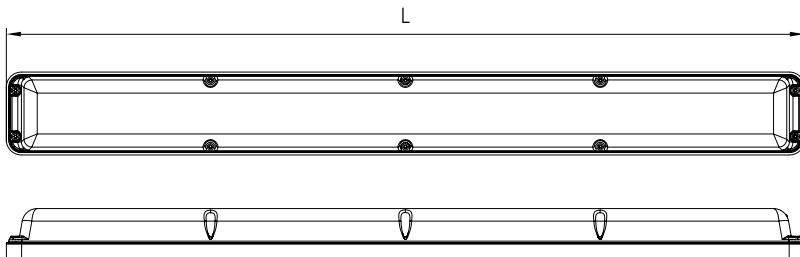

VERSION	L (MM)	W (MM)	H (MM)
VGOLS4D4TX	1308	137	83
VGOLS4D4PF	1308	137	83

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
VGOLS4D4TX	VANDAGUARD W/PROOF 4FT 21/30/37/51/61W 4K DALI DIM TORX SECURITY SCREW	21W	2700LM	129LM/W	8.00KG
		30W	3700LM	123LM/W	
		37W	4500LM	122LM/W	
		51W (DEF)	6000LM	118LM/W	
		61W	6900LM	113LM/W	
VGOLS4D4PF	VANDAGUARD W/PROOF 4FT 21/30/37/51/61W 4K DALI DIM PANTEFORE SCREW	21W	2700LM	129LM/W	8.00KG
		30W	3700LM	123LM/W	
		37W	4500LM	122LM/W	
		51W (DEF)	6000LM	118LM/W	
		61W	6900LM	113LM/W	

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.