

APPLY 1 WALL LIGHT

PRODUCT DETAILS

Rated life: L70 B50 50000hrs
 LED: 3000K/4000K/6000K, CRI85, 3SDCM
 Beam angle: Symmetrical
 Driver: Integral, Non-Dim
 Rating: IP65, Class I
 Operating temperature: -10°C to +40°C
 Housing: Die-cast EN AB-47100 aluminium
 Finishing: Black, Polyester powder coated with special anti-corrosion treatment for coastal areas, Salt Spray testing (in compliance with ISO 9227 standard)
 Diffuser/Lens: Tempered glass, Frosted
 Warranty: 5 year





MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Other finishing

APPLICATIONS

Surface mounted (wall), Internal/External
 Commercial buildings, Apartments, Residential areas

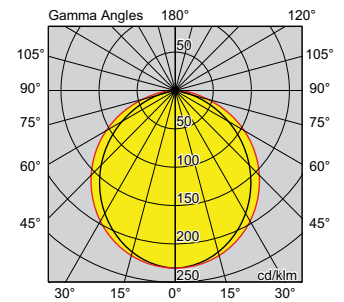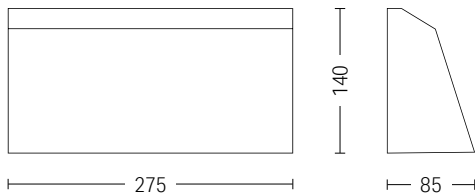

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
E8050-LBC	APPLY 1 WALL LIGHT 8W 3000K CRI85 NON-DIM	8W	518LM	65LM/W	1.3KG
E8050-LBN	APPLY 1 WALL LIGHT 8W 4000K CRI85 NON-DIM	8W	594LM	74LM/W	1.3KG
E8050-LBI	APPLY 1 WALL LIGHT 8W 6000K CRI85 NON-DIM	8W	620LM	78LM/W	1.3KG

[~]Tested system powers from luminaire. ^{*}Delivered lumens from luminaire, including thermal, electrical and optic losses. [^]Figures are interpolated / extrapolated from data at other versions.