

## NEW GREEN WALL LIGHT

### PRODUCT DETAILS


Rated life: L80 B20 50000hrs  
 LED: 3000K/4000K, CRI90, 3SDCM  
 Beam angle: Symmetrical/Asymmetrical  
 Driver: Integral, Non-Dim  
 Rating: IP65, IK07, Class II  
 Operating temperature: -10°C to +40°C  
 Housing: Die-cast EN AB-47100 aluminium  
 Finishing: Black, Polyester powder coated with special anti-corrosion treatment for coastal areas, Salt Spray testing (in compliance with ISO 9227 standard)  
 Diffuser/Lens: Tempered glass, Frosted/Clear  
 Accessory (order separately): Recessed box  
 Warranty: 5 year

### MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)


XS (116mm long)/XL (342mm long), White/Grey finishing

### APPLICATIONS

Surface mounted (wall), Internal/External  
 Commercial buildings, Apartments, Residential areas

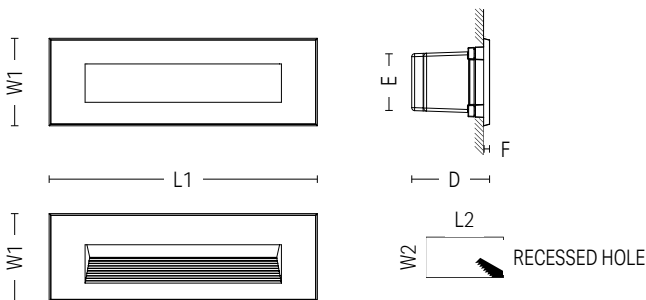

VERSION	L1 (MM)	W1 (MM)	L2 (MM)	W2 (MM)	D (MM)	E (MM)	F (MM)
NEW GREEN XS	116	73	99	60	65	60	5
NEW GREEN M	202	73	185	60	65	60	5
NEW GREEN XL	342	73	325	60	65	60	5

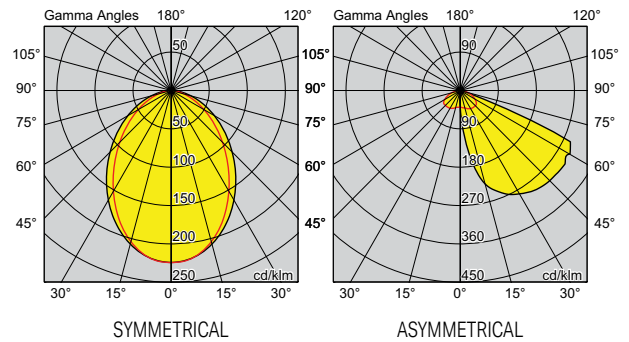

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>*</sup>	EFFICACY	WEIGHT
E5885-LBC	NEW GREEN WALL LIGHT M 5W 3000K CRI90 NON-DIM SYMMETRICAL BLACK	5W	210LM	42LM/W	0.8KG
E5882-LBC	NEW GREEN WALL LIGHT M 5W 3000K CRI90 NON-DIM ASYMMETRICAL BLACK	5W	195LM	39LM/W	0.8KG
E5885-LBN	NEW GREEN WALL LIGHT M 5W 4000K CRI90 NON-DIM SYMMETRICAL BLACK	5W	229LM	46LM/W	0.8KG
E5882-LBN	NEW GREEN WALL LIGHT M 5W 4000K CRI90 NON-DIM ASYMMETRICAL BLACK	5W	204LM	41LM/W	0.8KG
320001	NEW GREEN WALL LIGHT M RECESSED BOX				

<sup>~</sup> Tested system powers from luminaire. <sup>\*</sup> Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>^</sup> Figures are interpolated / extrapolated from data at other versions.