

OLODUM INGROUND LIGHT

PRODUCT DETAILS

Rated life: L90 B20 50000hrs
 LED: 3000K/4000K, CRI90, 3SDCM
 Beam angle: Symmetrical 15°/45°/65°
 Driver: Integral, Non-Dim
 Rating: IP67, IK10, Class I
 Operating temperature: -10°C to +40°C
 Housing: Die-cast EN AB-47100 aluminium
 Finishing: Stainless steel faceplate, Polyester powder coated with special anti-corrosion treatment for coastal areas, Salt Spray testing (in compliance with ISO 9227 standard)
 Diffuser/Lens: Tempered glass, Clear, Metallised polycarbonate reflector, Horizontal rotation 360°, Vertical tilt 15°
 Accessory: Complete with ground recessed box
 Warranty: 5 year





MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Asymmetrical, Flush recessed, Marine grade

APPLICATIONS

Ground recessed, External
 Small facades, Trees, Walls

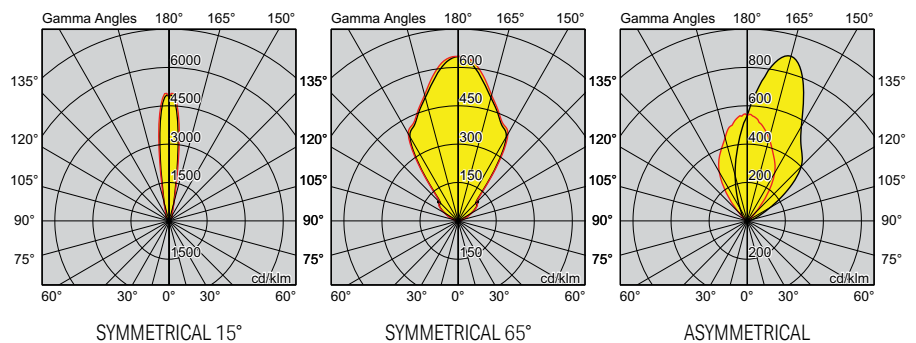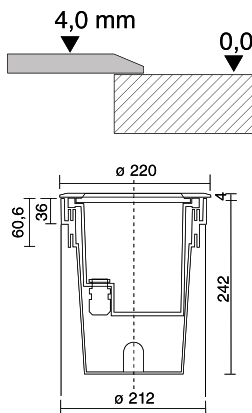

CODE	DESCRIPTION	POWER [~]	LUMENS*	EFFICACY	WEIGHT
E8128-LBC-S	OLODUM INGROUND LIGHT STANDARD COB 17W 3000K CRI90 15° NON-DIM	17W	2076LM	122LM/W	3.8KG
E8128-LBC-FL	OLODUM INGROUND LIGHT STANDARD COB 17W 3000K CRI90 45° NON-DIM	17W	2060LM	121LM/W	3.8KG
E8128-LBC-WF	OLODUM INGROUND LIGHT STANDARD COB 17W 3000K CRI90 65° NON-DIM	17W	1865LM	110LM/W	3.8KG
E8128-LBC-AS	OLODUM INGROUND LIGHT STANDARD COB 17W 3000K CRI90 ASYMMETRICAL NON-DIM	17W	1764LM	104LM/W	3.8KG
E8128-LBN-S	OLODUM INGROUND LIGHT STANDARD COB 17W 4000K CRI90 15° NON-DIM	17W	2240LM	132LM/W	3.8KG
E8128-LBN-FL	OLODUM INGROUND LIGHT STANDARD COB 17W 4000K CRI90 45° NON-DIM	17W	2223LM	131LM/W	3.8KG
E8128-LBN-WF	OLODUM INGROUND LIGHT STANDARD COB 17W 4000K CRI90 65° NON-DIM	17W	2010LM	118LM/W	3.8KG
E8128-LBN-AS	OLODUM INGROUND LIGHT STANDARD COB 17W 4000K CRI90 ASYMMETRICAL NON-DIM	17W	1903LM	112LM/W	3.8KG

[~]Tested system powers from luminaire. ^{*}Delivered lumens from luminaire, including thermal, electrical and optic losses. [^]Figures are interpolated / extrapolated from data at other versions.