

LUMEN SELECT COLOUR SELECT





## PIERLUX ECO HIGHBAY GEN8

### PRODUCT DETAILS

- Size: Ø310mm (200W), Ø270mm (120W)
- Lumen maintenance: L70/B10 54,000hrs
- LED: Colour Select 4000K/5000K, CRI85, 3SDCM
- Beam angle: Symmetrical, 90°
- Glare control: Improved optical design for better glare control
- Driver: Integral, Lumen Select, Non dimmable, Flicker free
- Surge protection: 6kV/3kA
- Rating: IP65, IK08, Class I
- Operating temperature: -40°C to +50°C
- Housing: Aluminium
- Finishing: Black, Powder coated
- Diffuser/Lens: Polycarbonate (PC), Clear, Ribbed
- Connection: 1.7m Flex & Plug
- Accessory: Optional Surface mount bracket, Rod mount bracket, Polycarbonate refractor, Polycarbonate refractor lens, Aluminium reflector, Wire guard, Motion sensor and remote control
- Warranty: 5 year

### APPLICATIONS

Suspended/Surface mounted (ceiling), Internal/External  
Warehousing, Industrial facilities, Workshops, Retail environments, Cold storage, Sports facilities

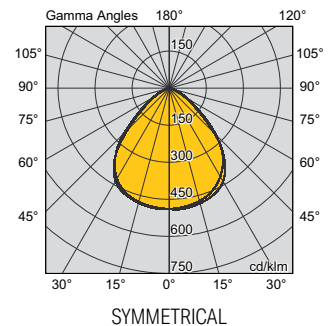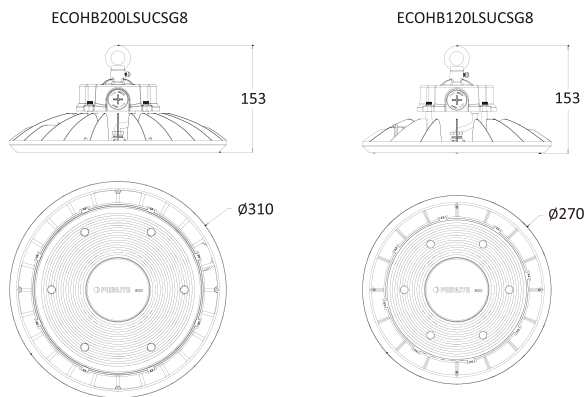

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS*	EFFICACY	WEIGHT
ECOHB200LSUCSG8	PIERLUX ECO HIGHBAY LUMEN SELECT 200W PSU 4K/5K CRI85 3SCDM	200W	30600LM	153LM/W	2.0KG
		160W	25600LM	160LM/W	
		120W	19700LM	164LM/W	
ECOHB120LSUCSG8	PIERLUX ECO HIGHBAY LUMEN SELECT 120W PSU 4K/5K CRI85 3SCDM	120W	18100LM	151LM/W	1.6KG
		90W	14500LM	161LM/W	
		70W	11100LM	159LM/W	
HBBRKT	SURFACE MOUNT BRACKET	N/A	N/A	N/A	N/A
HBRODBRKT	ROD SURFACE MOUNT BRACKET	N/A	N/A	N/A	N/A
HBPCREFR	POLYCARBONATE REFRACTOR	N/A	N/A	N/A	N/A
HBPCLENS	POLYCARBONATE REFRACTOR LENS FOR POLYCARBONATE REFRACTOR HBPCREFR	N/A	N/A	N/A	N/A
HBALREFL	ALUMINIUM REFLECTOR	N/A	N/A	N/A	N/A
HBWG	WIRE GUARD	N/A	N/A	N/A	N/A
ECOHSFHF	MOTION SENSOR	N/A	N/A	N/A	N/A
PRC11	REMOTE CONTROL FOR PROGRAMMING MOTION SENSOR ECOHSFHF	N/A	N/A	N/A	N/A
HBRIP2MKIT	HIGHBAY GRIPPLE SUSPENSION KIT - PURLIN BRACKET 2M HANGER	N/A	N/A	N/A	N/A

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire; ^Figures are interpolated / extrapolated from data at other versions.